


PICPROTO™S1 Prototyping Board

Copyright ©2006 microEngineering Labs, Inc.

\$14⁹⁵

- ❖ High quality double-sided board
- ❖ Solder mask both sides
- ❖ Switchable pull-up resistors
- ❖ Connector to solderless breadboard
- ❖ Overall dimensions 1.9" X 2.15"

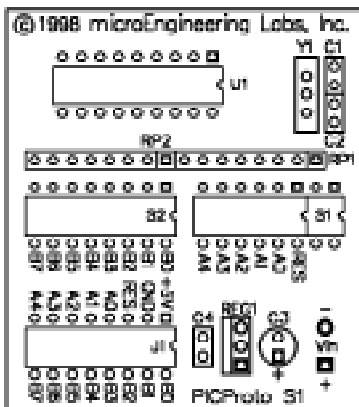


- U1 - 18-pin PIC® microcontroller
- Y1 - 4MHz crystal or ceramic resonator
- C1, 2 - 22pf oscillator capacitors
- C3 - 10uf input capacitor
- C4 - .1uf bypass capacitor
- REG1 - 5 volt regulator
- RP1, 2 - 7x10K bussed resistor packs
- S1 - 6- or 8-position DIP switch
- S2 - 8-position DIP switch
- J1 - 16-pin DIP socket

- +5V - plus 5 volts
- GND - ground
- RES - /Reset (/MCLR)
- A0-4 - PORTA, pins 0-4
- B0-7 - PORTB, pins 0-7

NOTES:

Pin 1 is marked with a square pad.
Note polarity of Vin, REG1, resistor packs, and any polarized capacitors.
J1 may connect to a solderless breadboard with a DIP jumper.
DIP switches S1 & S2 connect a pull-up resistor to any I/O pin.
DIP switch S1-RES will reset the MCU.
Application information can be found in "Easy PIC'n" and "PIC'n Up the Pace" from Square 1 Electronics (or us).

SCHEMATIC:

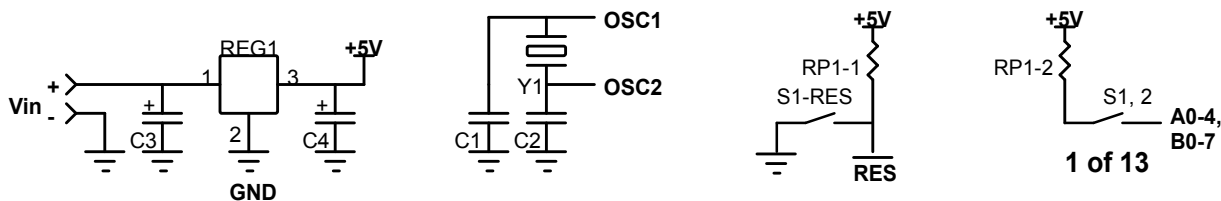

SOURCES:

PIC® documentation is available from:
Microchip Technology Inc.
2355 West Chandler Blvd.
Chandler AZ 85224-6199
(480) 792-7200
(480) 792-7277 fax

Easy PIC'n and PIC'n Up the Pace is available from us or:
Square 1 Electronics
PO Box 1414
Hayden, ID 83835
(208) 664-4115
(208) 772-8236 fax

microEngineering Labs, Inc.

Box 60039 Colorado Springs CO 80960
(719) 520-5323 (719) 520-1867 fax

<http://www.melabs.com>
email: support@melabs.com